

A. Input Characteristics:

- 1) Voltage: (100-127) / (200-250)VAC
- 2) Frequency: 50/60 Hz.
- 3) Line Current: 15A / 12A Maximum
- 4) Load Capacity: 2.40 / 3.68 KVA
- 5) Overload Protection: (1) 2P/15 AMP CB
- 6) Power Cord: NO
- 7) Connector: IEC 60320 C20

B. Output Characteristics:

- 1) Voltage: (100-127) / (200-250)VAC
- 2) Current: 15A / 12A, Total Combined Load
- 3) Outlets: 9X IEC 60320 C13
- 2) RoHS: Compliant to Directive 2002/95/EC

C. Mechanical Characteristics:



- 1) Material: CRS
- 2) Finish: Powder Coat, Black, Fine Texture
- 3) Lettering: Silk-Screen, White/Epoxy
- 4) Storage Temp.: (-13) - 149F (-25 - 65C)

D. Operating Environment:

- 1) Temperature: 32 - 122F (0 - 50C)
- 2) Relative Humidity: 0 - 95% (Non-Condensing)
- 3) Elevation: 0 - 10,000FT (0 - 3000 m)

E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, UL60950-1, CE

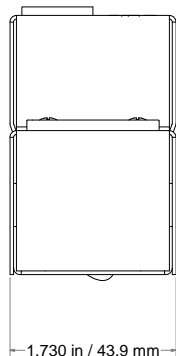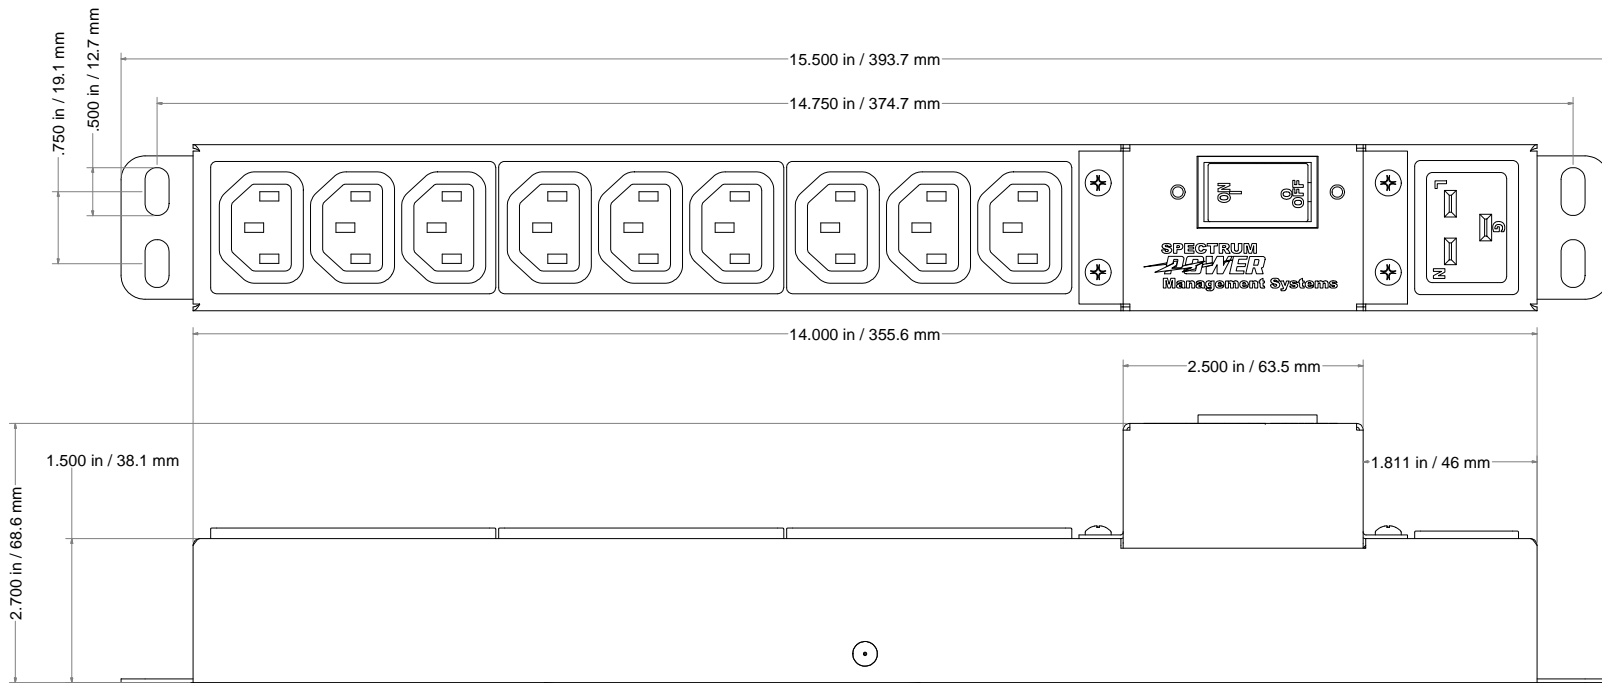

0 51472-ENG CHANGE NOTICE	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS $\pm 1/64$ DECIMAL $.XX \pm .020$ DECIMAL $.XXX \pm .010$ ANGLES $\pm 0'30''$		PDU,0U-SAT,9/C13,15A,CB
				THIRD ANGLE PROJECTION
	DRAWN: CarrS	DATE 11/3/2009	SHEET: 1 OF 1	CODE IDENT NO: