

A. Input Characteristics:

- 1) Voltage: 100-240VAC
- 2) Frequency: 50/60Hz.
- 3) Line Current: 16A Maximum
- 4) Load Capacity: 3.84 KVA@ 240VAC
- 5) Overload Protection: 16A Thermal Circuit Breaker
- 6) Power Cord: NO
- 7) Inlet: IEC 60320 C20; L-N-G

B. Output Characteristics:

- 1) Voltage: 100-240VAC
- 2) Current: 16A Total Combined Load
- 3) Outlets: 12 x IEC 60320 C13; L-N-G

C. Mechanical Characteristics:




- 1) Material: CRS
- 2) Finish: Black Powder Coat
- 3) Lettering: White Silk-Screen
- 4) Storage Temp: -13 to 149F (-25 to 65C)

D. Operating Environment:


- 1) Temperature: 32 to 122F (0 - 50C)
- 2) Relative Humidity: 0 to 95% (Non-Condensing)
- 3) Elevation: 0 to 10,000FT (0 to 3048 m)

E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, UL60950-1, CE
- 2) RoHS: Compliant to Directive 2011/65/EU
- 3) Pending Japan, China, Taiwan, Korea, Russia & Australia Certifications

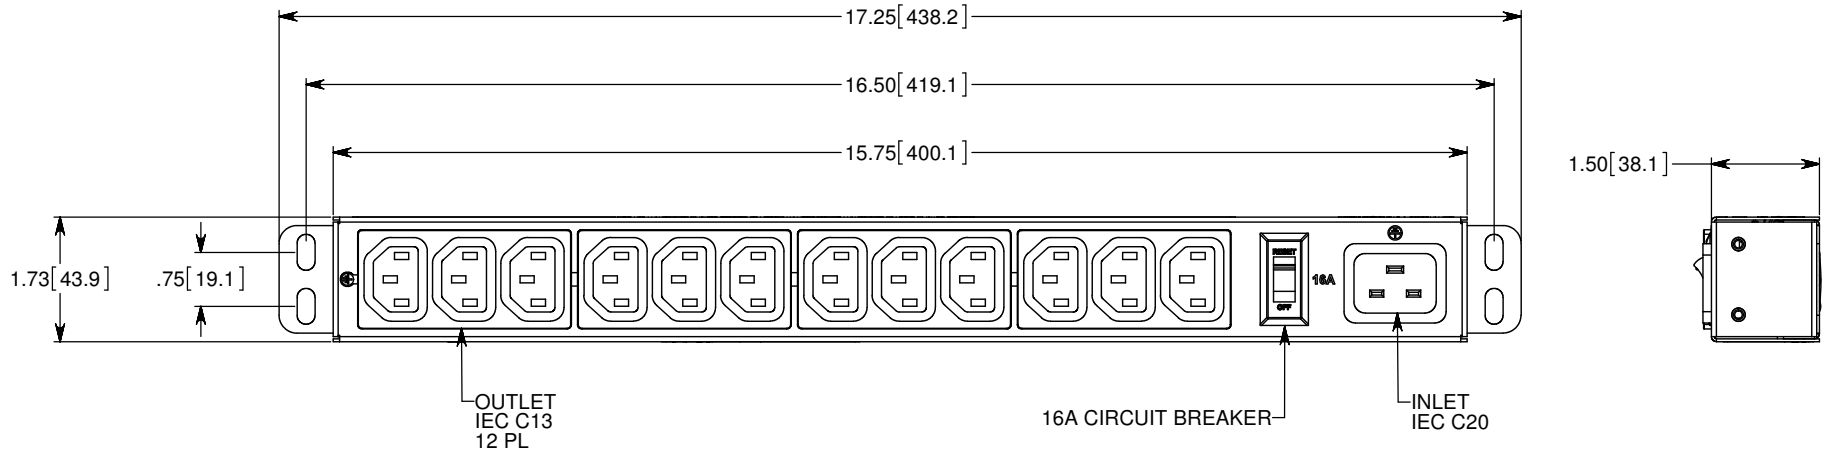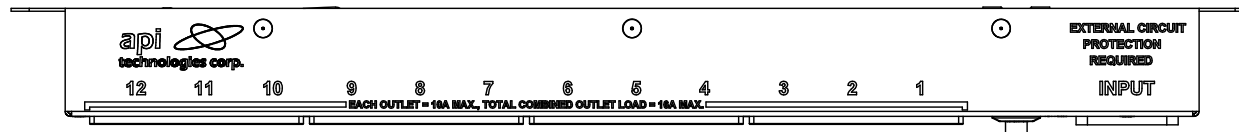

C13 OUTLET



C20 INLET

ECN 005815-PS CHANGE NOTICE	REV BP 01	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF SPECTRUM CONTROL, INC. OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONAL ± 1/64" DECIMAL .X ± .030 DECIMAL .XX ± .020 DECIMAL .XXX ± .010 ANGLES ± 0° 30'		
	SATELLITE, 100-240V, 16A/CB, 12 x C13, C20 72A-116BULEN-01		DRAWN: TB DATE: 11/19/13 SHEET: 1 OF 1	ENGINEER: JB STATE COLLEGE, PENNSYLVANIA	