

A. Input Characteristics

- 1) Voltage: 100-250VAC
- 2) Frequency: 50/60Hz.
- 3) Current: 20A Maximum (16A Derated, N.A.)
- 4) Load Capacity: 3.84 KVA@ 240VAC
- 5) Overload Protection: EXTERNAL INPUT PROTECTION REQUIRED
- 6) Power Cord: NO
- 7) Inlet: IEC 60320 C20



B. Output Characteristics:

- 1) Voltage: 100-250VAC
- 2) Current: 16A Total Combined Load
- 3) Outlets: 12 x IEC 60320 C13

C. Mechanical Characteristics:





- 1) Material CRS
- 2) Finish: Black Powder Coat
- 3) Lettering: White Silk-Screen
- 4) Storage Temp: -13 to 149F (-25 to 65C)

D. Operating Environment:


- 1) Temperature: -4 to 122F (-20 to 50C)
- 2) Relative Humidity: 0 to 95% (Non-Condensing)
- 3) Elevation: 0 to 10,000FT (0 to 3048 m)

E. Regulatory Conformance:

- 1) Safety Agency: UL/cUL, UL60950-1, FCC 15 Class A, UL60950-1
- 2) RoHS: Compliant to Directive 2011/65/EU

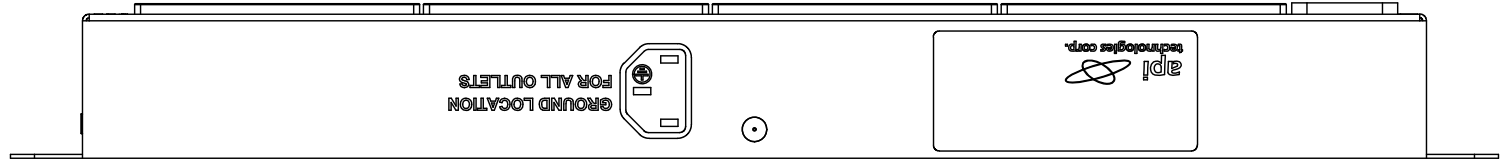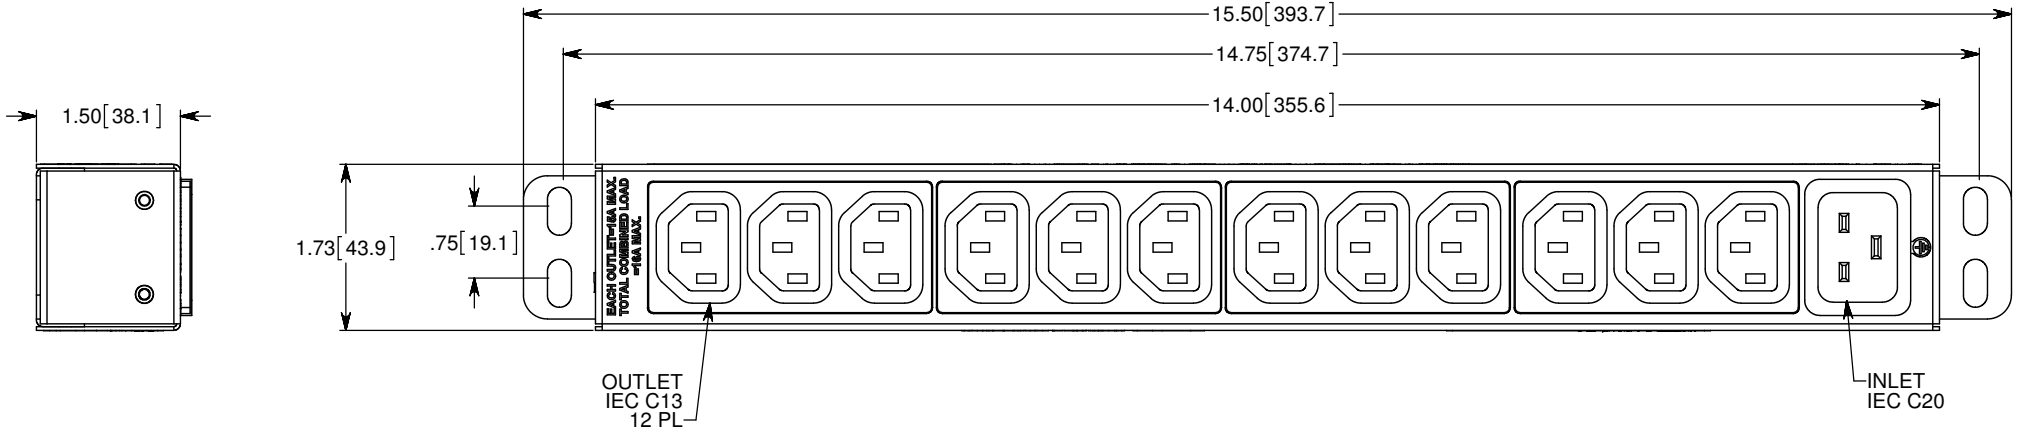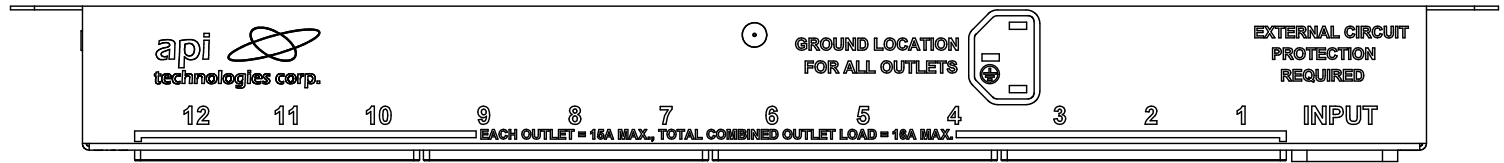

C13 OUTLET



C20 INLET

ECN 11089	CHANGE NOTICE	REV	DS 09	DRAWINGS IN ACCORDANCE WITH STANDARD ANSI Y14.5M-1994 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS COPYRIGHTED. EXCEPT WITH THE WRITTEN PERMISSION OF API OR ITS SUBSIDIARIES, SUCH INFORMATION SHALL NOT BE PUBLISHED OR DISCLOSED TO OTHERS, OR USED FOR ANY PURPOSE AND THIS DOCUMENT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART.	TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONAL ± 1/64" DECIMAL .X ± .030 DECIMAL .XX ± .020 DECIMAL .XXX ± .010 ANGLES ± 0° 30'	THIRD ANGLE PROJECTION	api technologies corp.	SATELLITE, 100-240V, 20A, 12xC13, C20 72A-120NULEN-00
			DRAWN: SC DATE: 2/22/08 SHEET: 1 OF 1	ENGINEER: CL STATE COLLEGE, PENNSYLVANIA				